

Great Power in the Ultra-Slim Body

VORMATIC ESL TAG 3.5 SPECIFICATION


Datasheet: V1.0



ESL TAG 3.5

BRIEF INTRODUCTION

ESL TAG 3.5 is a 35-inch ultra-thin ESL independently developed by Vormatic. By utilizing the latest Bluetooth® Low Energy 5.0 Technology, it features a 9.8mm ultra-thin design, secure, fast data transfer and agile screen refresh. ESL TAG 3.5, reveals a fully-graphic display and paperlike appearance by adopting the latest E-ink display technology. With the 2.5D transparent shell, it delivers a nearly 180° viewing angle for excellent readability.

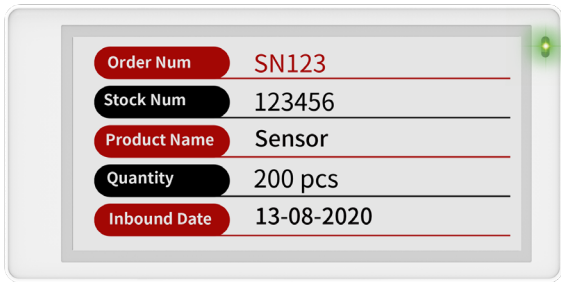


SPECIFICATION

| | |
|--------------------|-------------------------|
| Material | PC1100 |
| Color | White |
| Dimension | 99.5*49.5*9.8mm |
| Display Technology | EPD |
| Screen size | 3.5-inch |
| Display Area | 79.4*37.9mm |
| Resolution | 384*184 px |
| Pixel Density | 122 dpi |
| Weight | 45g |
| Battery Lifetime | 6 years (5 updates/day) |
| Fixing Ways | Shelf Rail/Paste etc. |
| Display Color | Black White Red |

HIGHLIGHT

- Updating in seconds
- 6-year battery lifetime (5 updates/day)
- REST API
- LED location indicator
- Managed by Cloud/APP
- Customized templates
- 2.5D transparent shell
- 9.8mm ultra-thin design

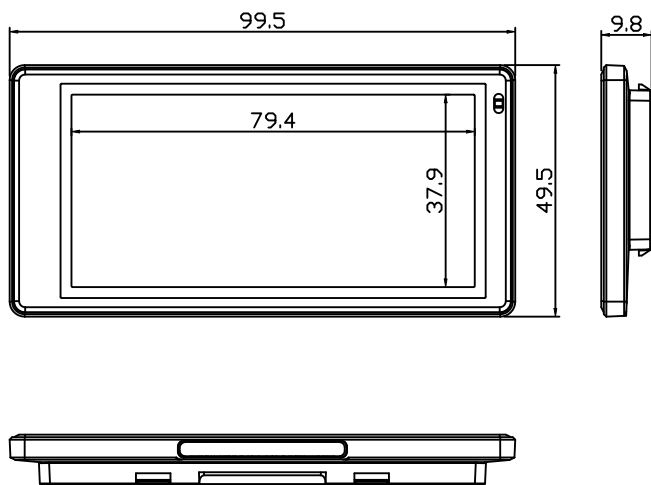

TECHNICAL PARAMETER

| | |
|------------------------|---------------------------|
| Communication Protocol | Bluetooth® Low Energy 5.0 |
| Battery | CP502440 |
| Transmitting Distance | 70-80 Meters |
| Working Humidity | 50±20%RH |
| Operating Temperature | 0°C-40°C |
| Storage Temperature | -20°C-60°C |
| Protection Level | IPX5 |

