


VORMATIC LCD VIDEO WALL INDOOR



- Original LG / Innolux LCD Video Wall Panel
- Built-in video wall processor
- Interface: VGA-IN, DVI-IN, HDMI-IN, AV-IN, AV-OUT, USB port
- Complete Video Wall Solution with software
- Easy Installation & Maintenance







Specifications				
Panel Information				
Size	49”	55”	65”	75”
Panel Type	a-Si, TFT-LCD, LED backlight	a-Si, TFT-LCD, LED backlight	a-Si, TFT-LCD, LED backlight	a-Si, TFT-LCD, LED backlight
Contrast Ratio	16:9	16:9	16:9	16:9
Slim Bezel	3.5mm (Active to Active)	0.88/ 2.6/3.5mm (Active to Active)	4.7mm (Active to Active)	4.7mm (Active to Active)
Resolution	1920x1080	1920x1080	1920x1080	3840x2160
Brightness	500nits	500nits	500nits	500nits
Active area(mm)	1073.78*604	1209.6*680.4	1428.48*803.52	1650.24*928.26
Contrast Ratio	4000:1	1400:1	1400:1	5000:1
Display Color	16.7M	16.7M	16.7M	16.7M
Viewing Angle	178/178	178/178	178/178	89/89/89/89
Response Time	9.5ms	8ms	8ms	6.5ms
Frequency	60Hz	60Hz	60Hz	60Hz
Life Time	≥ 50,000hours	≥ 50,000hours	≥ 50,000hours	≥ 50,000hours
Embedded controller				
HDMI IN	1			
Signal Frequency	60Hz			
Video				
TV System	PAL/NTSC/SECAM			
Compatible Inputs	480P/576P/720P/1080P			
3Dcombfilter	YES			
Video Noise Reduction	YES			
Power				
Power Supply	AC100~240V;50/60HZ			
Operating Temperature	0 ~ 50℃			
Others				
Language	English, etc.			
Storage Temperature	-20 ~ 60℃			
Operation Humidity	20%~80%			
Installation	Embedded, Wall Mounted			

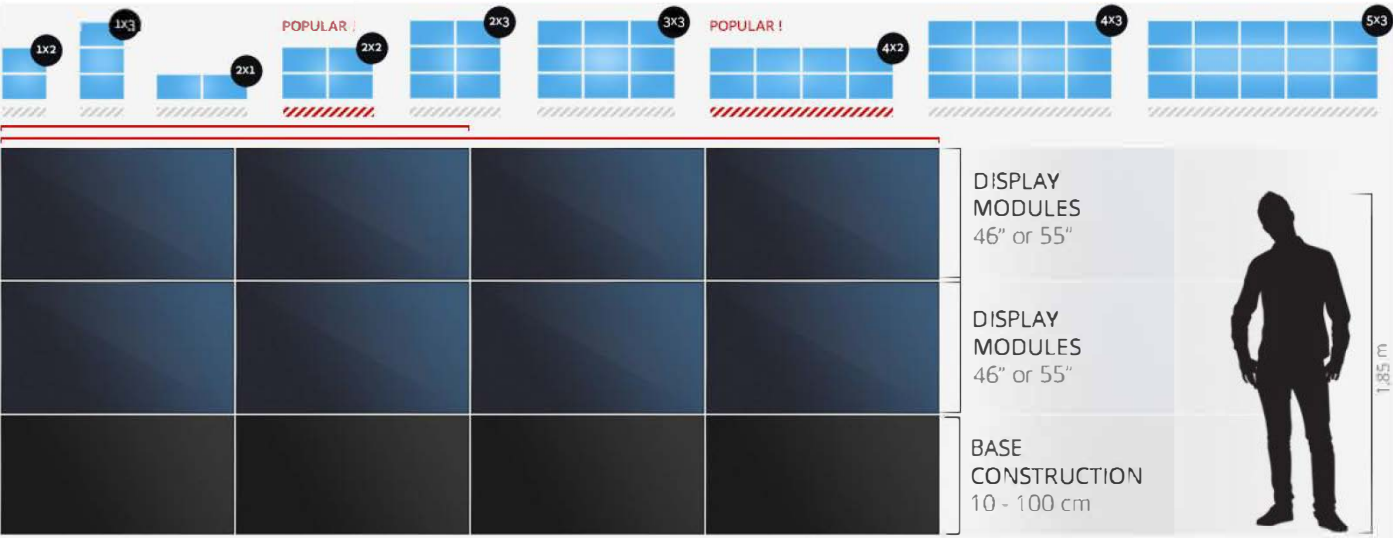

Connection Method

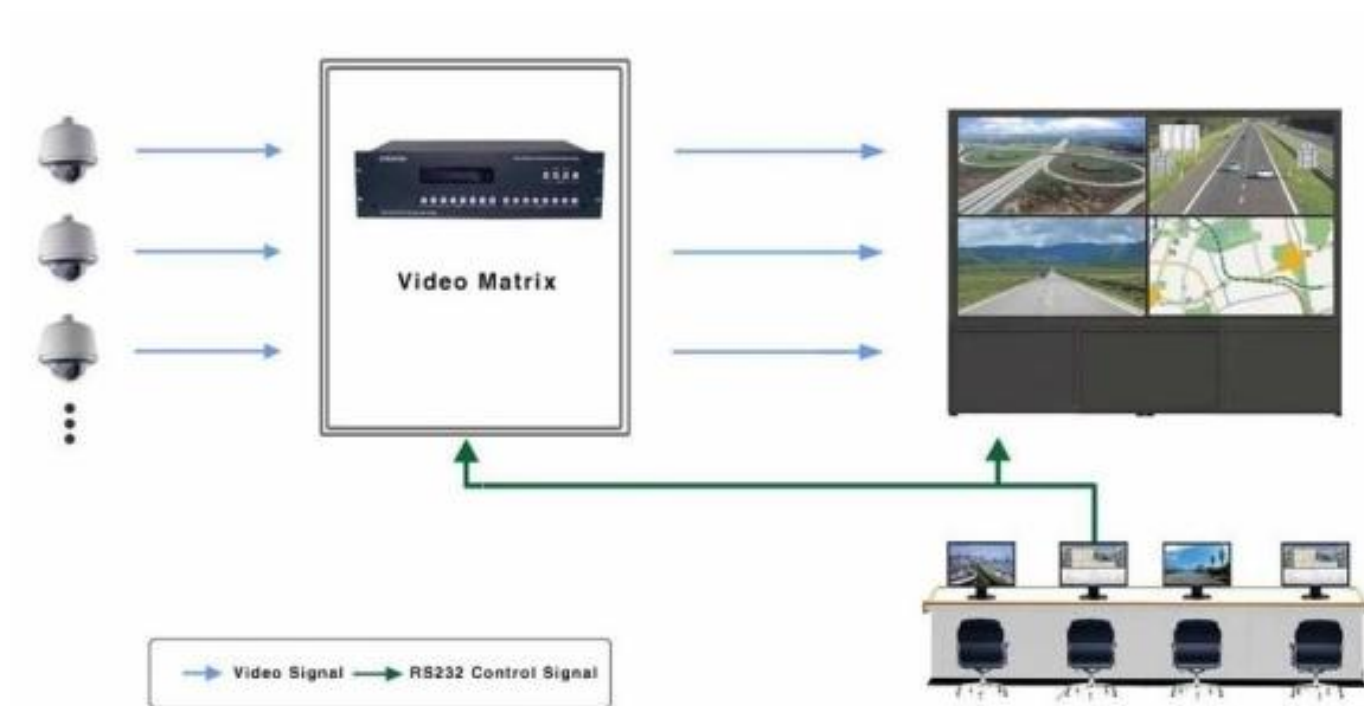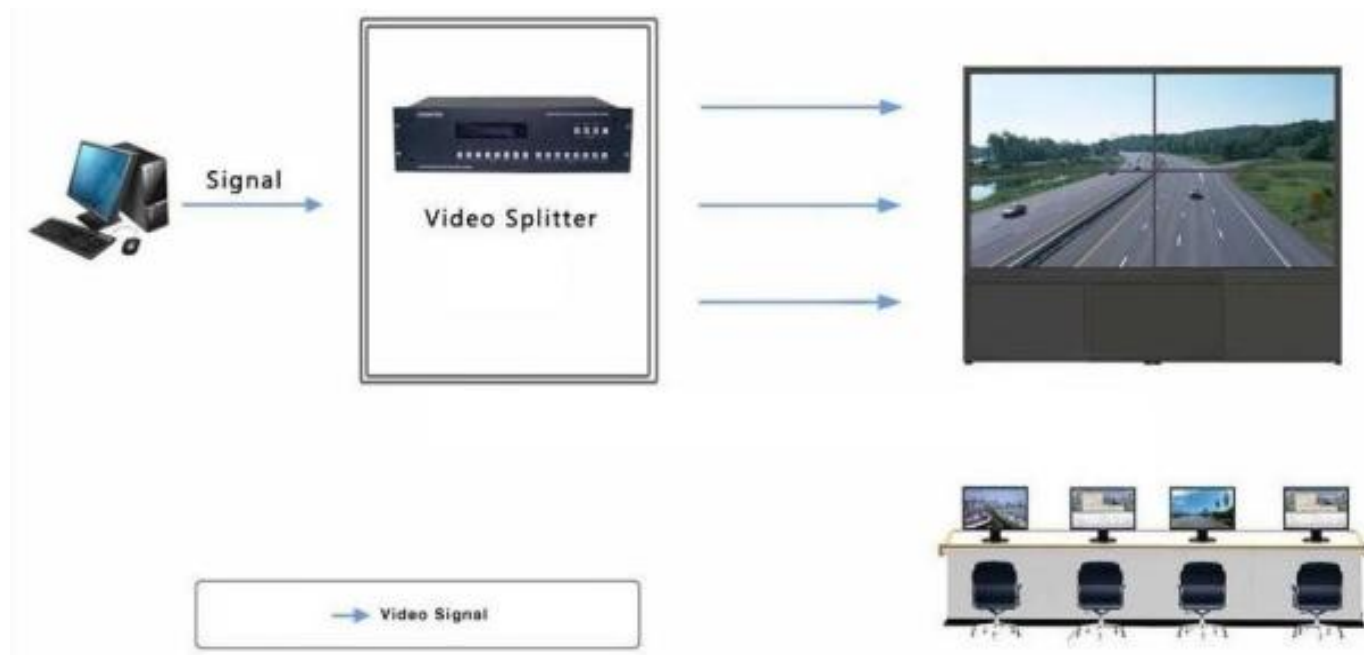

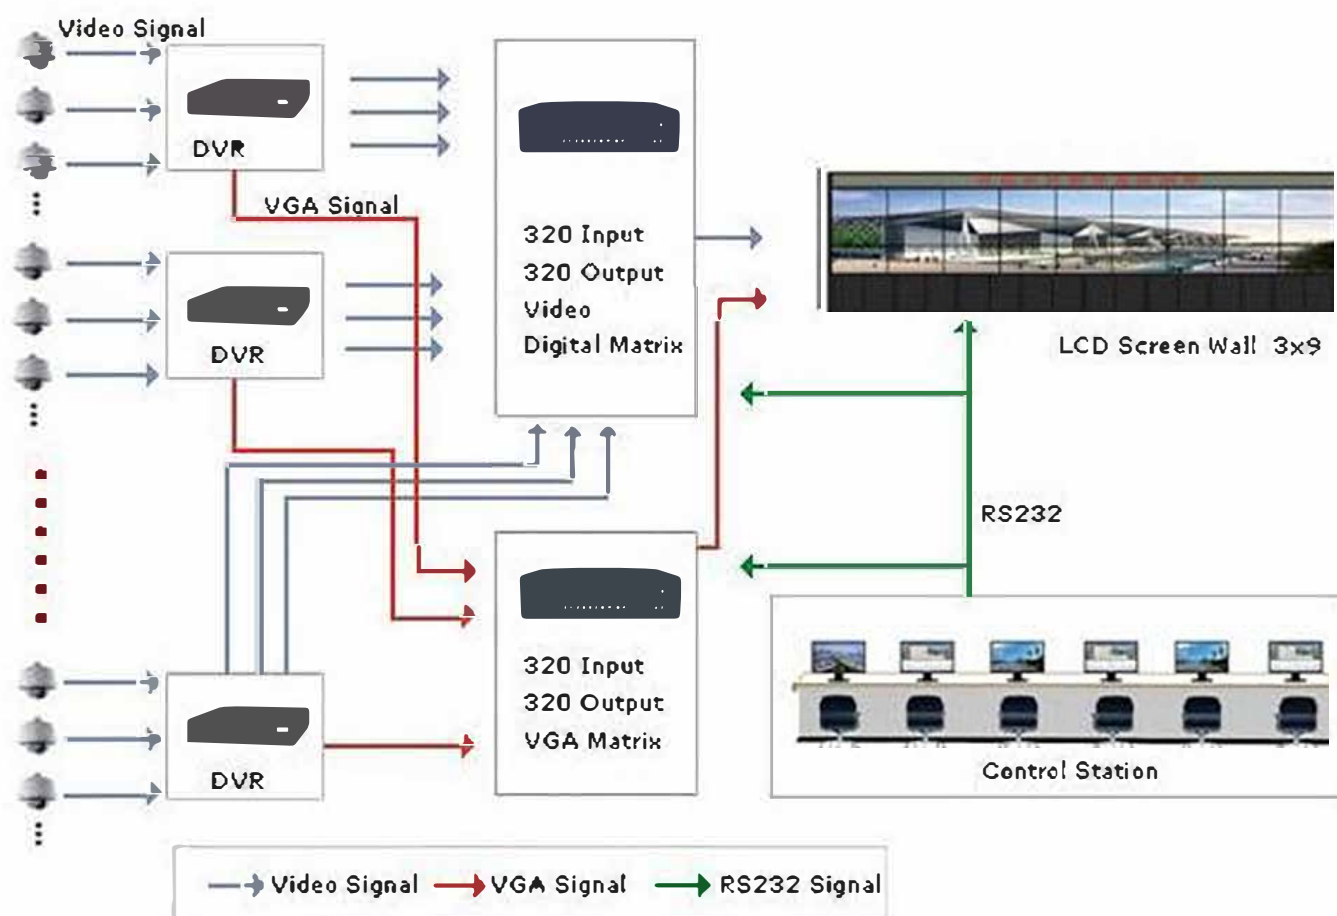

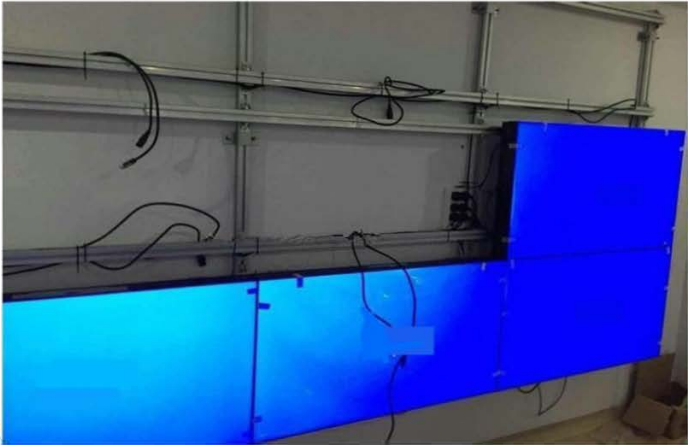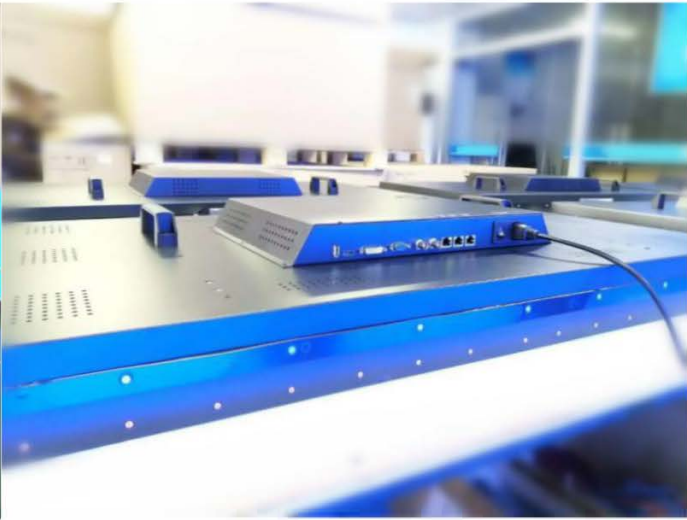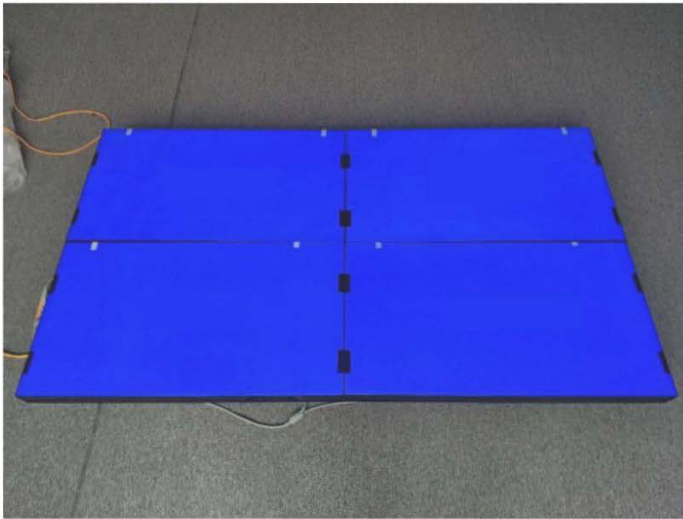



Pothook



Handle



Splitter



Matrix (optional)



HDMI cable



VGA cable



DVI cable



1 / Wall Mounting



2 / Floor Standing




3 / Floor Standing Cabinets



4 / Front Push Hydraulic Pop Out

VORMATIC OFFERS YOU COMPLETE SOLUTION

- **Original Industrial A+ Panel**

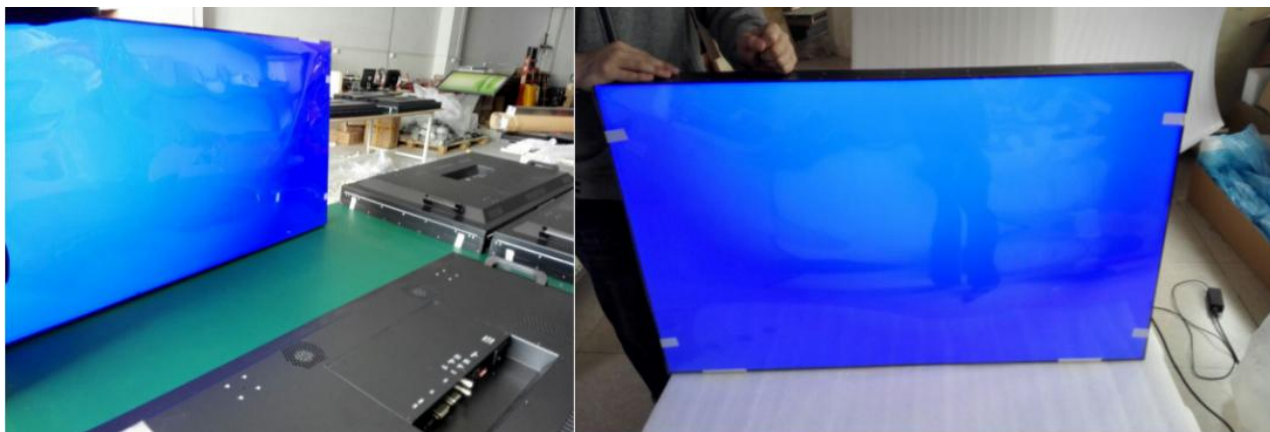

- **Embedded with Video Wall Processor**



- **Ultra Narrow Design (active to active seam)**



- High brightness 500nits



- DID Control Software

